

- For sensors with optical fiber cable
- View angle 2° horizontal, 25° vertical
- Material stainless steel Ø 57 mm
- Ambient temperature up to 150 °C



Product Characteristics

Type	OAA 264
Art.-No.	6047A
Application	For sensors with fiber optic cable


Technical Data

View angle	2° horizontal, 25° vertical
Ambient temperature	-30 ... +150 °C
Optical material	temperature-resistant quartz glass
Material	stainless steel

Optic

Measurement distance a [m]	0	1	2	3	4	5
Spot horizontal x vertical [mm] with LLK	15 x 40	40 x 350	75 x 950	130 x 1550	185 x 2150	240 x 2750
Spot horizontal x vertical [mm] with LLKL	15 x 40	20 x 350	37,5 x 950	65 x 1550	92,5 x 2150	120 x 2750

Dimension (mm)

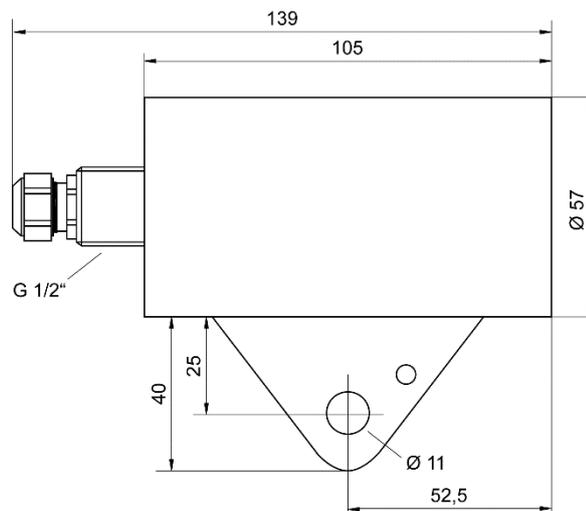

Accessories (in scope of supply)

	Type	Art.-No.
-	-	-

Accessories (not in scope of supply)

	Type	Art.-No.
Swivel stand	HM 2	9816B
Pilot light attachment for adjustment	DAK 308	6913G
Adapter for Pilot light attachment	OL 26	9828H
Air purge attachment	OL 34	9828Q
Protection tube 100 mm for air purge attachment OL 34	OL 37	9828T
Appropriate protection sets for fiber optic cable available		

Further information

	Document
-	-