

- alignment aid of optical sensors
- Laser light green




Product Characteristics

Type	DAK 308
Art.-No.	6913G
Application	For alignment of optical sensors without internal pilot light

Technical Data

Wavelength	500 up to 540 nm
Max. Output	<1mW
Laser Class	2
Ambient temperature	-25 ... +50 °C
Material	stainless steel

Dimension (mm)

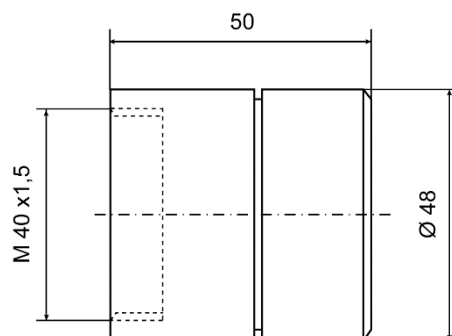

Accessories (in scope of supply)

	Type	Art.-No.
2 batteries LR1	-	-

Accessories (not in scope of supply)

	Type	Art.-No.
Adapter for stainless steel housing Ø 57 mm (i.e., OAA; OKA, LSA)	OL 26	9828H
Adapter for stainless steel housing Ø 76 mm (i.e., OKB; LSB,)	OL 27	9828I
Adapter for optic Ø 20 mm (i.e., OAC; OACF,)	OL 28	9828K

Further information

	Document
-	-